

TECHN. DATEN (TECHNICAL DATA):

NENNDRUCK (NOMINAL PRESSURE) P_N 70 MPa (700bar)

PRÜFDRUCK (TEST PRESSURE) P_P 84 MPa (840bar)

GEWICHT (WEIGHT) 16,0 kg

(INKL. 0,3m SCHLÄUCHE U. KUPPLUNGEN; INCL. 0,3m HOSES AND COUPLINGS)

ÖLBEDARF (REQUIRED OIL VOLUME) 0,10 l

STEUERUNG (SAFETY FEATURES)

SICHERHEITSSCHALTUNG ENTSPRECHEND EN 13204 (WHEN
CONTROL KNOBS IN NEUTRAL POSITION, OIL CIRCULATES
WITHOUT EXERTING PRESSURE)

Klasse (CLASS):

EN 13204 CK37/370-H-16

NFPA 1936 A6/B8/C6/D8/E7



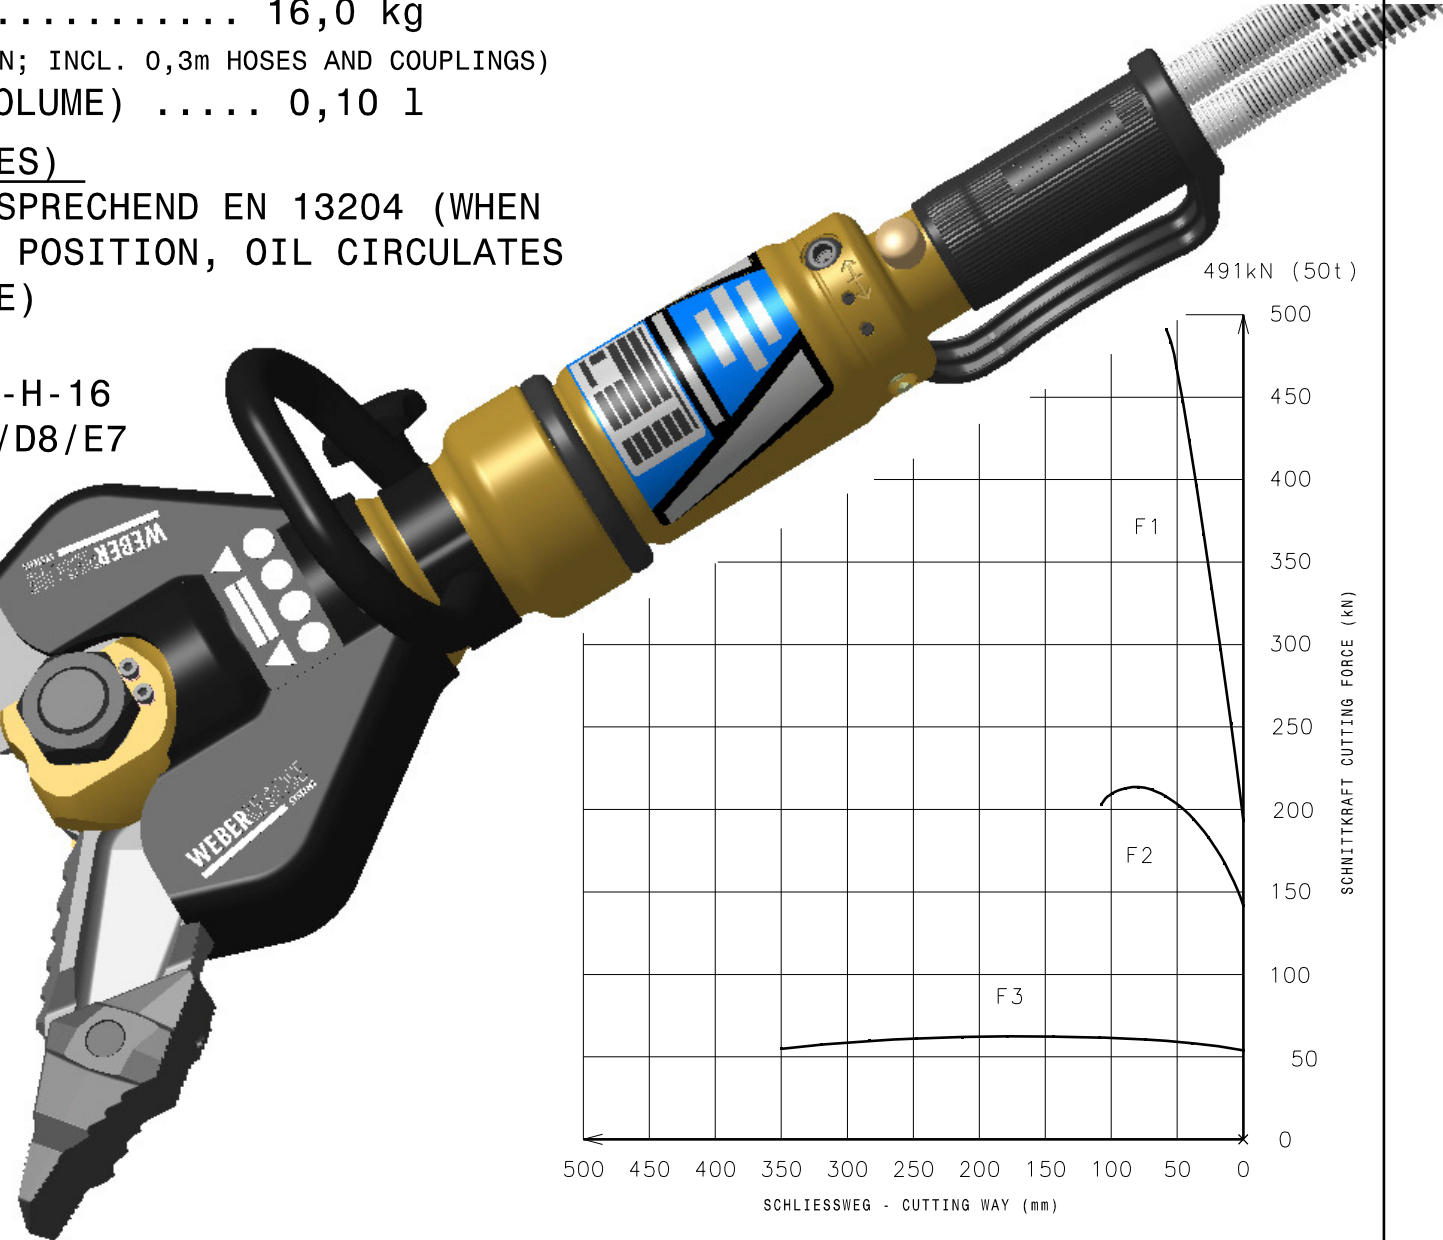


DIAGRAMM BEI 70 MPa u. OHNE WIRKUNGSGRAD
DIAGRAM AT 70 MPa AND WITHOUT EFFICIENCY

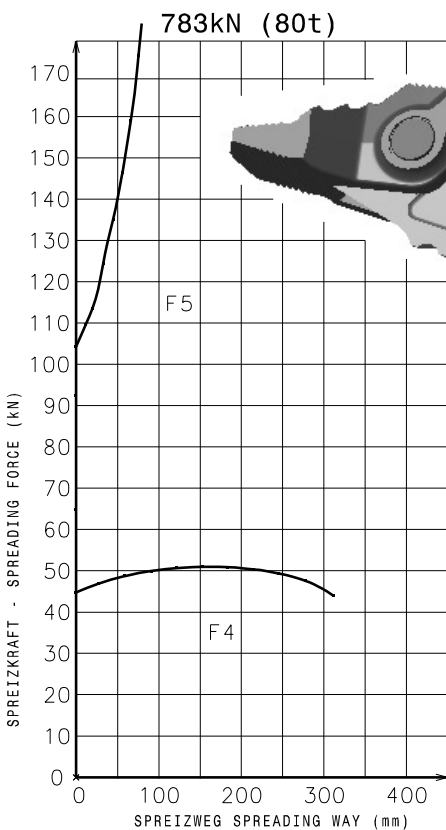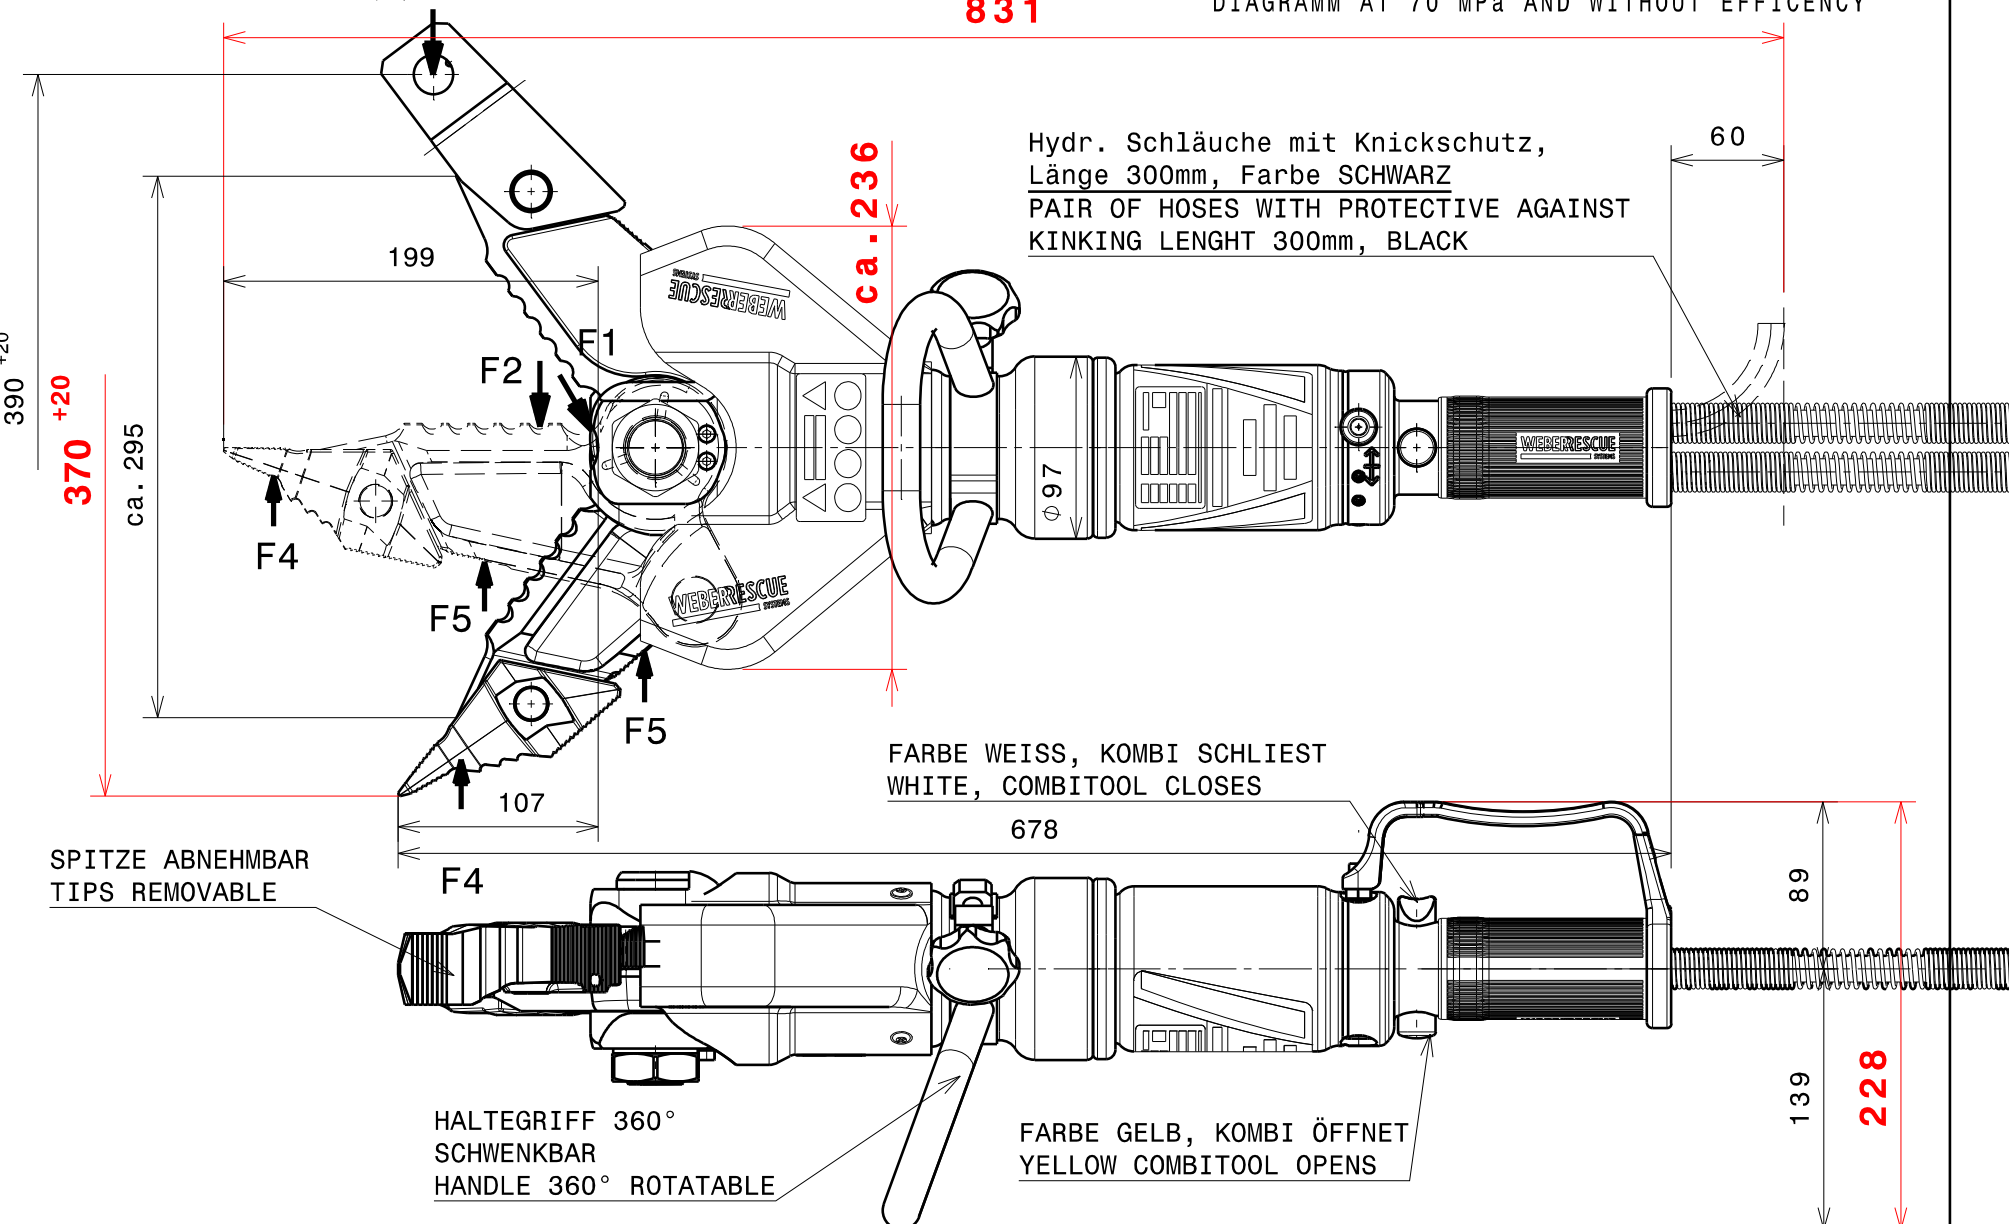

FREIMASSTOLERANZEN (GENERAL TOLERANCES)	LAENGENMASS (LENGHT)mm					WINKELMASS (ANGLE)	
	TOLERANZ (TOLERANCE)mm	...50	50...250	250...1000	1000...	TOLERANZ (TOLERANCE)	...180°
		±1,5	± 2,0	± 3,0	± 5,0		±10°